

DRAWING FROM SQUARE

DESCRIPTION: HANDRAIL




DATE

SWM

EXPOSED SURFACE

BREAK-THROUGH
VERY SLOWLY

PAINTED
MATERIAL

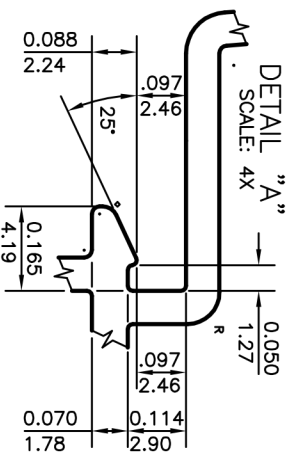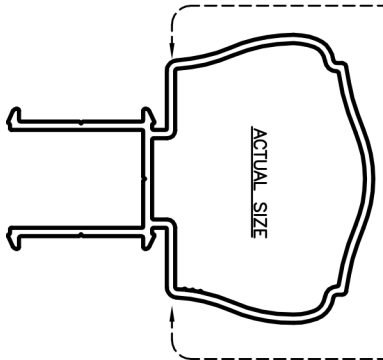


- ⊙ = 0.015(0.38) D. X 90°
- ⊙ = 0.015(0.38) R.
- ⊙ = 0.030(0.76) R.
- (R) = 0.062(1.57) R.

ARCHITECTURAL
FENCE & RAILINGS

UNREGISTERED WALL THICKNESS
±.010 ±0.25
0.065(1.65)

EST. AREA	0.622	IN ²	401	MM ²	OUT PER.	12.139	IN	308	MM
EST. WT.	0.732	LB/S/FT.	1.089	KG/M	FACTOR	26			
EST. PER.	18.691	IN	475	MM	C.C.N.	3.020	IN	77	MM
DRAWN BY	W.S.	ALLOY	6063-T5		SCALE	2:1	DATE	10/03/26	

BREAK ALL CORNERS 0.16" R (0.41 mm) R UNLESS OTHERWISE NOTED.
STANDARD ALUMINUM ASSOCIATION TOLERANCES TO APPLY UNLESS OTHERWISE SPECIFIED

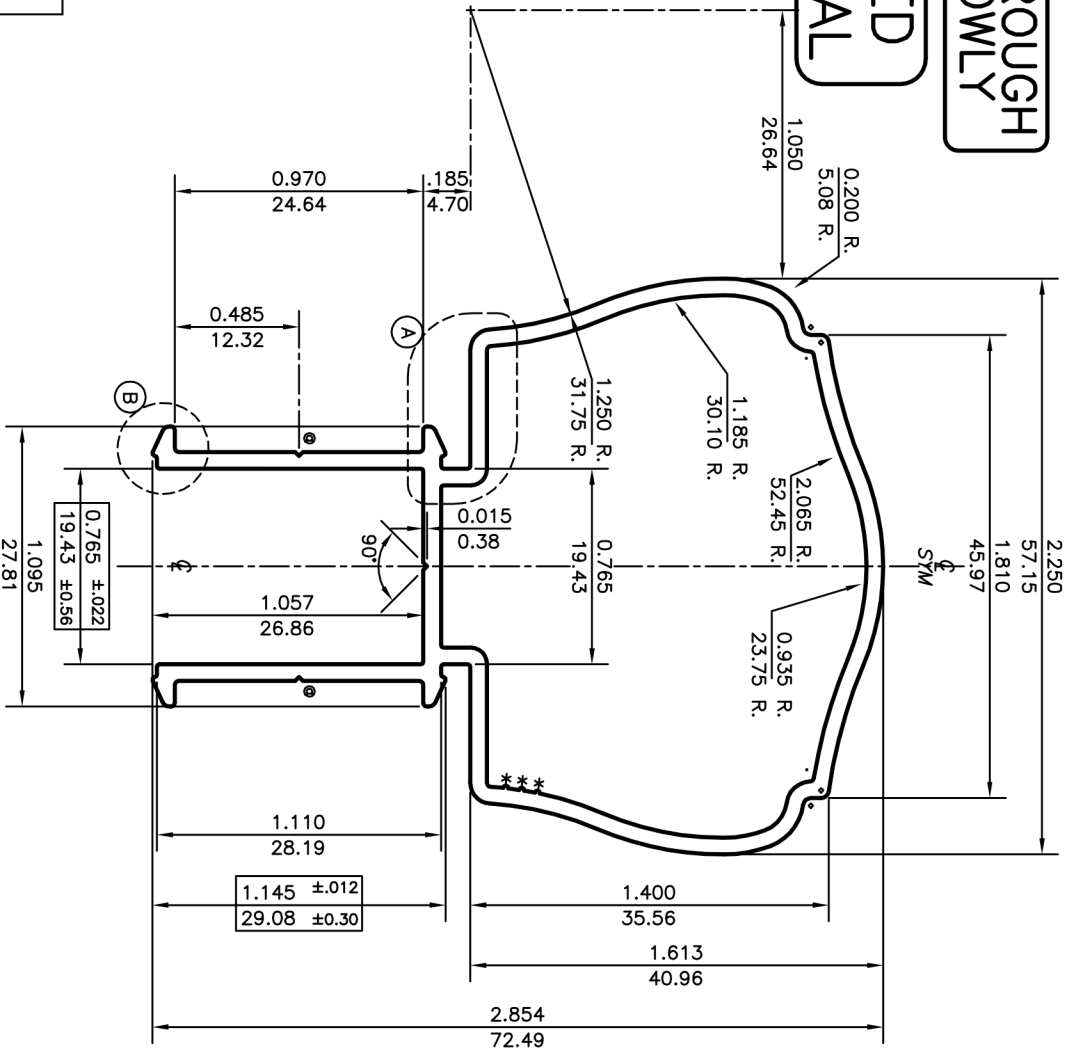

(*) = 0.010(0.25) R. X 0.010(0.25)H. SAPA I.D. MARKS