



DESCRIPTION:	—	TARRIF# 7604.21.00.00	PROPOSAL# 40915-3
	DATE	SYM	REVISION

NO I.D. MARKS DUE TO THIN WALL.

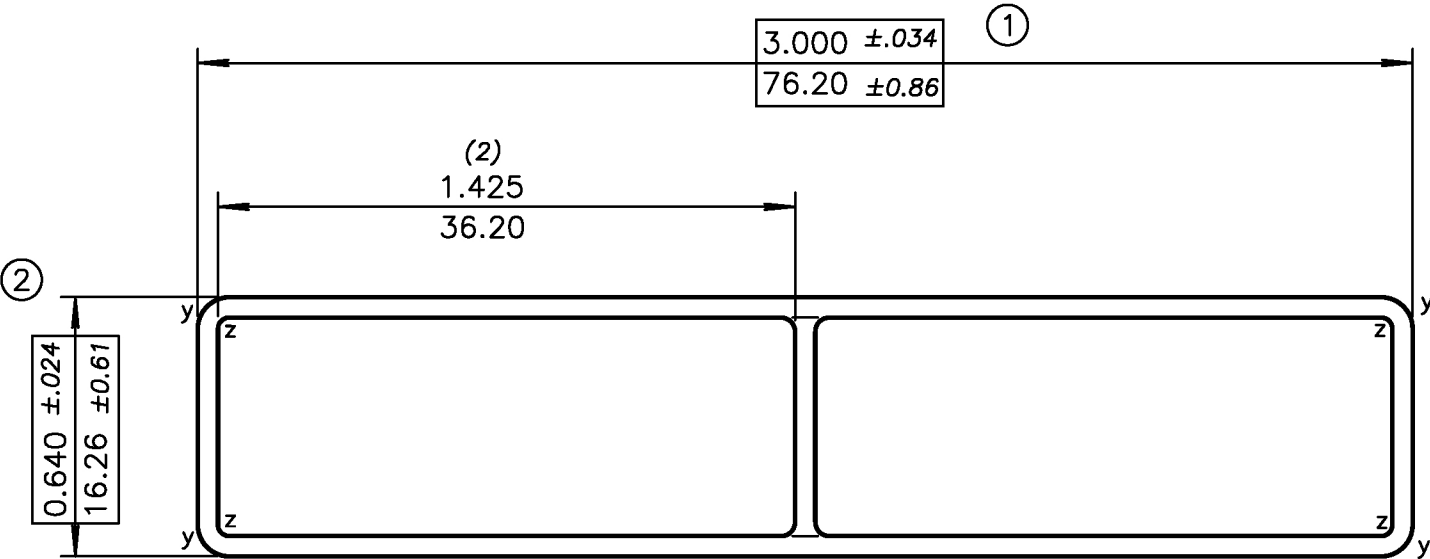

PLEASE ALLOW FLATNESS TOLERANCE
0.006" PER 1.000" OF WIDTH

ALL OUTSIDE SURFACES EXPOSED

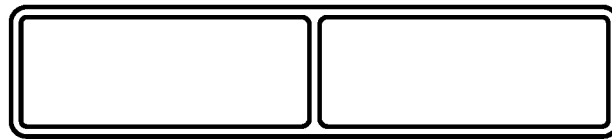

ACTUAL SIZE

CUSTOMER'S SUPPLIED CAD FILE

BREAK CORNERS = 0.035 (0.97) R.
(z) = 0.028 (0.71) R. (4)
(y) = 0.078 (1.98) R. (4)

ARCHITECTURAL FENCE & RAILINGS		UNSPECIFIED WALL THICKNESS	SIGNED: _____ DATE: _____
		③ 0.050(1.27) ±0.010(0.25) H	
EST. AREA 0.378 IN ² 244 MM ²	OUT PER. 7.146 IN 182 MM		
EST. WT. 0.454 LBS/FT. 0.675 KG/M	FACTOR 33		
EST. PER. 14.893 IN 378 MM	C.C.D. 3.041 IN 77 MM		
DWN BY Kim	ALLOY 6063-T5	SCALE 2:1	DATE 15,03,2024
BREAK ALL CORNERS .016"R (0.41 mm)R UNLESS OTHERWISE NOTED.			STANDARD ALUMINUM ASSOCIATION TOLERANCES TO APPLY UNLESS OTHERWISE SPECIFIED